

RKTE85-MC1



desktop version



- 85 keys, silicone rubber
- IP67 sealing
- 38 mm ergonomic trackball

IEC60945 MARINE RUBBER KEYBOARD WITH ERGONOMIC TRACKBALL

This 85 key backlit keyboard features a compact keyboard with integrated waterproof 38 mm ergonomic trackball with scroll wheel. The rubber keys are proven for efficient cleaning, reduced disinfection time and protection against cross contamination. The backlit keys warrant for optimized performance while working in low-light environments. Panel mount and desktop version available.

MAIN FEATURES

- Certificate of Conformity fully compliant with IEC60945
- Compact layout, 85 full travel keys
- 38 mm waterproof ergonomic trackball with hall-effect scroll wheel

panel mount

- Removable ball for easy cleaning
- Dimmable backlighting at 8 levels by two dedicated keys (FN key + arrow up/down)
- No external power supply necessary, keyboard port power sufficient
- · Low power LED's warrant for a long life
- · White backlighting as standard, other colours on request
- Compact thickness

PANEL MOUNT VERSION

- Front panel mounting with M3 stud, 10 x M3 x 15 mm
- Dimensions: 415 x 145 x 79 mm
- Weight: 0,7 kg

DESKTOP VERSION

- ABS enclosure
- Dimensions: 420 x 150 x 68,22 mm
- Weight: 1,2 kg

CUSTOMIZATION

Possible customization includes adapted backlighting controls, addition of company logo or specific function keys, different layouts, different colour. All this without having to reapply for certification.



GENERAL TECHNICAL SPECIFICATIONS

KEYBOARD

Sealing Keys Pointing device Output **Power requirements** Operating temp. Storage temp. Switch force Switch stroke Lifetime switches

TRACKBALL **Ball size/material**

Tracking force Ball load

Resolvable ball speed Tracking engine Removable ring

SCROLL WHEEL

Wheel diameter Wheel material Wheel colour Encoding technology Magnet strength Dentent-scrolling force Switch actuation force LEFT/RIGHT SWITCH Switch actuation force

IP67 sealed frontal 85 full travel rubber keys 38 mm ergonomic trackball 1,6 m USB cable Directly from USB port -15°C to +70°C -40°C to +85°C 300 grams ± 100 grams 1.5 mm 1 million actuations

Ø38,1 mm (1.5")/Epoxy resin 30 - 80 grams - PTFE seal 100N (10 kg) maximum downward pressure for 2 minutes @ 20°C 30 IPS (inches per second) Infra-red optical navigation technology PC/ABS, black

Ø25 mm PC/ABS Grey Hall effect N42



30 grams nominal 275 ± 125 grams force

 250 ± 100 grams force

ORDER INFO

COUNTRY LAYOUT	PANEL MOUNT	DEKSTOP VERSION
US Qwerty	RKTE85B0001-W-MC1	RKTE85S0001-W-MC1
Cyrillic Qwerty	RKTE85B0007-W-MC1	RKTE85S0007-W-MC1
French Azerty	RKTE85B0033-W-MC1	RKTE85S0033-W-MC1
Danish Qwerty	RKTE85B0045-W-MC1	RKTE85S0045-W-MC1
German Qwertz	RKTE85B0049-W-MC1	RKTE85S0049-W-MC1

USB output

White backlighting as standard, other colours on request

VER 5 - 2023 10 The company reserves the right to alter without prior knowledge the specification or design of any standard product or service

NSI bv • Kapittelstraat 18 • 3740 Bilzen • Belgium +32 (0)89 51 90 00 • info@nsi-be.com


ISO 9001 ISO 14001

p1/3



DIMENSIONAL DRAWING

PANEL MOUNT

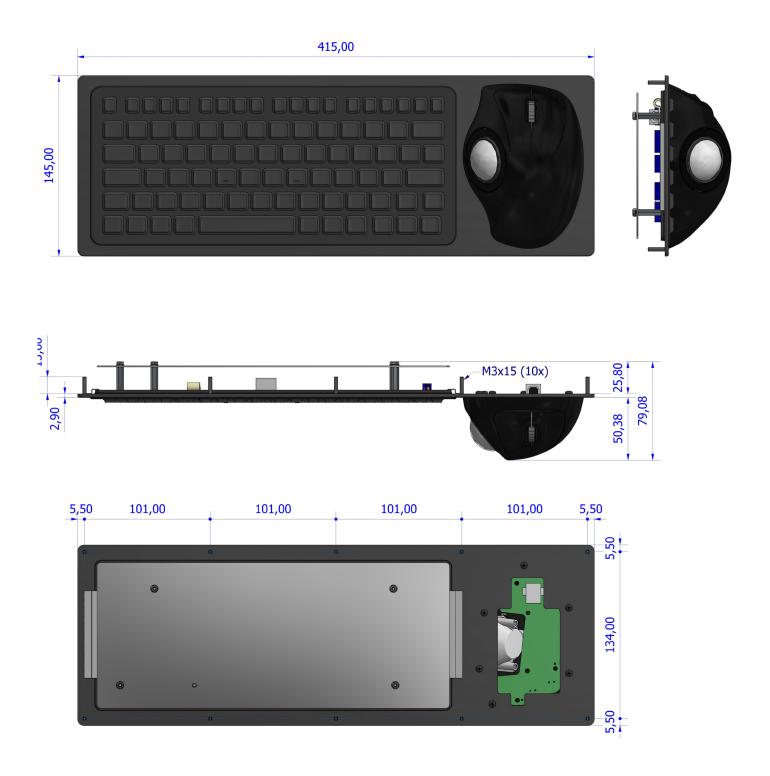

p 2 / 3

The company reserves the right to alter without prior knowledge the specification or design of any standard product or service.

RKTE85-MC1



DIMENSIONAL DRAWING

DESKTOP



ISO 9001 ISO 1<u>4001</u>

RKTE85-MC1