



panel mount/studs



panel mount/holes

- 38 mm optical ball
- IP65 sealing
- integrated scroll wheel

ERGONOMIC 38 MM PANEL MOUNT TRACKBALL

The TBE38 trackball is an extremely high specification device that incorporates the latest IP65 technology. The trackball combines the patented optical trackball technology with the new hall-effect scroll wheel to provide a fully waterproof desktop trackball solution. To compliment these two technologies the trackball also includes left, middle, and right switch functionality as found in all conventional trackballs/mice making the TBE38 trackball a complete human interface solution for control of a cursor. The solid state design allows the device to be subjected to extreme conditions and provides the user with the ability to wash down, decontaminate, and sterilise the module, making it the ideal trackball for a wide range of demanding applications and environments.

MAIN FEATURES

- Sealing to IP65
- Infra-red optical navigation technology
- Integrated IP65 hall-effect scroll wheel
- Integrated left, middle and right switch functionality
- 38mm ball for precise cursor movement
- Removable ball for easy cleaning
- Outputs: USB & PS/2 (auto select)
- Wired USB cable providing high reliability and avoiding the need for batteries
- Smooth operation in rugged environments
- No special driver required

PANEL MOUNT VERSION

- Dimensions: see page 2-3
- Weight: 0,7 kg
- Carrier material: Aluminium
- Carrier finish: Bead blasted & clear anodised

CUSTOMIZATION

Possible customization includes addition of company logo or a different ball colour.

GENERAL TECHNICAL SPECIFICATIONS

TRACKBALL

Ball size/material	Ø38,1 mm (1.5")/Epoxy resin
Ball colour	metallic grey
Tracking force	20 - 40 grams - PTFE seal
Ball load	100N (10 kg) maximum downward pressure for 2 minutes @ 20°C
Resolvable ball speed	30 IPS (inches per second)
Tracking engine	Infra-red optical navigation technology
Removable ring	PC/ABS, black

SCROLL WHEEL

Wheel diameter	Ø25 mm
Wheel material	PC/ABS
Wheel colour	Grey
Encoding technology	Hall effect
Magnet strength	N42
Dentent-scrolling force	30 grams nominal
Switch actuation force	450 +/- 100 grams force

LEFT/RIGHT SWITCH

Switch actuation force	250 ± 100 grams force
------------------------	-----------------------

ORDER INFO

Panel mount with studs	TBE38F0
Panel mount with holes	TBE38N0

USB output
This trackball is also available as IEC 60945 certified version, see type TBE38F0-0BT1-MC3 or TBE38N0-0BT1-MC3.



GENERAL TECHNICAL SPECIFICATIONS

ENVIRONMENTAL

Operating temperature:	-15°C to +70°C (IEC 60068-2-1, IEC60068-2-2)
Storage temperature:	-40°C to + 85 °C (IEC 60068-2-1, IEC60068-2-2)
Operating humidity:	93% RH @ 40°C, non-condensing (IEC 60068-2-78)
Storage humidity:	10%-95% non-condensing (IEC 60068-2-78)
Vibration:	2g, 10-500Hz, 1 octave/min, 10 sweep cycles (IEC 60068-2-6)
Operating Shock:	15g/11ms, ½ sine, 3 shocks in +ve and –ve direction, all 3 axes (IEC 60068-2-27)
Mechanical lifetime:	1 million ball revolutions
MTBF:	in excess of 80,000 hours (MIL-STD-217F)
ESD:	15kV air-discharge and 8kV contact discharge (IEC 61000-4-2)
EMC:	Radiated immunity - limits according to level 3 of IEC 61000-4-3
	Radiated emissions to EN55022 class B


ELECTRICAL

Supply voltage:	4.4V to 5.25V DC
Supply current:	100mA Max.
Trackball resolution:	1200 counts per ball revolution @ 1 IPS (inches per second) +/- 10% 2400 counts per ball revolution @ 5 IPS (inches per second) +/- 10%
Scroll wheel resolution:	24 counts per wheel revolution
Output connector:	USB "A" type connector with 2 metre cable
Mating output connector:	Standard USB "A" type socket

The E38 trackball provides conventional X and Y axis cursor movement with an additional Z-axis scroll wheel. The Z-axis scroll wheel provides scroll/zoom and middle button capabilities for more effective navigation in complex user interfaces and operating systems (please note the function of the scroll wheel is software dependent). The trackball also features a removable retention ring enabling the user to remove the ball for servicing and maintenance purposes.

DIMENSIONAL DRAWING

PANEL MOUNT WITH STUDS

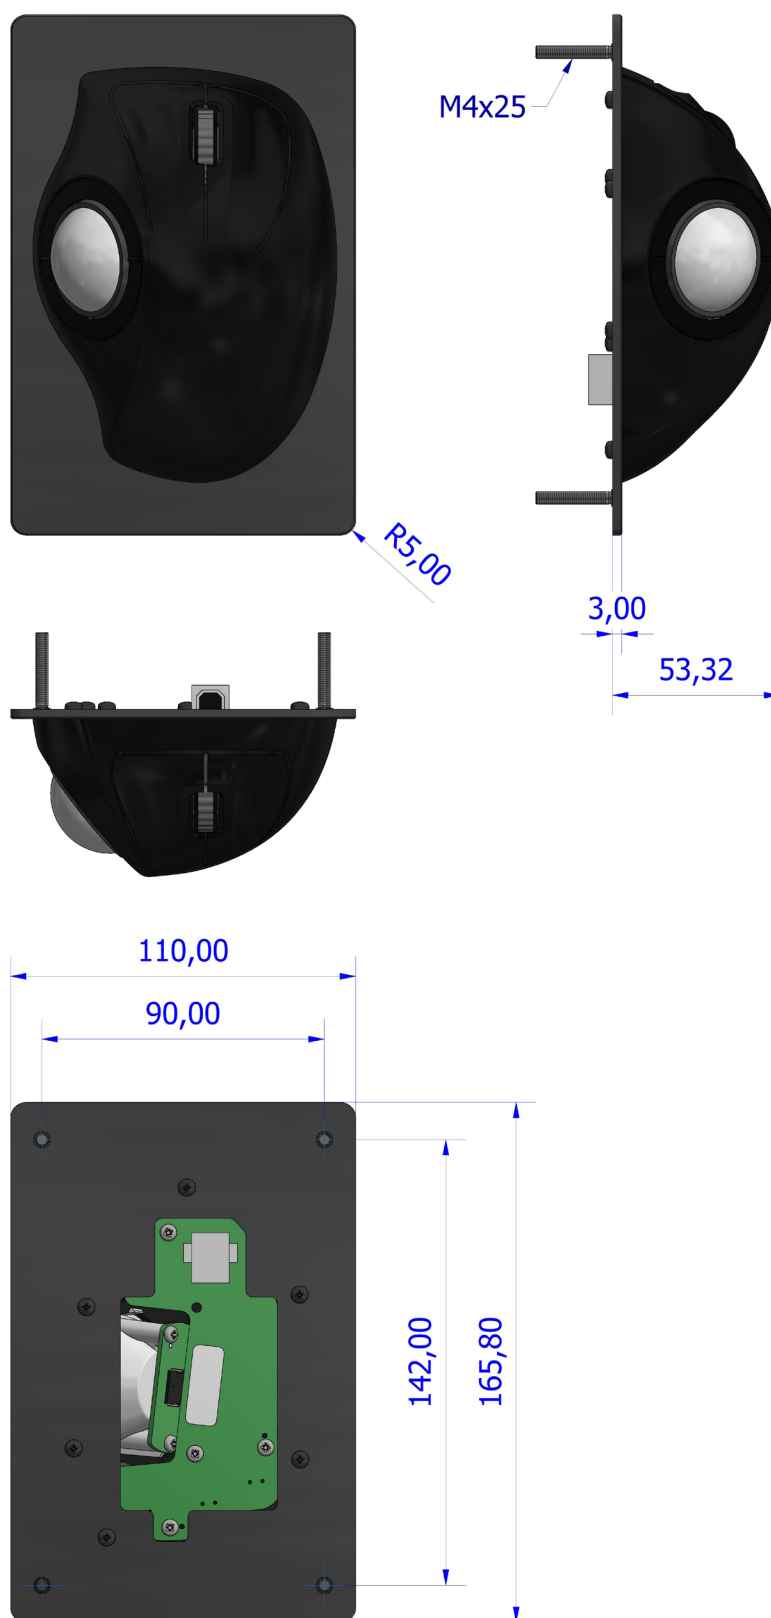

DIMENSIONAL DRAWING

PANEL MOUNT WITH HOLES

