

80 KEY COMPACT SHORT TRAVEL KEYBOARD



KSTM80

The KSTM80 keyboard uses short travel switches with low pressure and positive tactile feedback for convenient data entry. In spite of its compact dimensions, this keyboard emulates all major key functions of a large multifunctional keyboard thanks to its "Fn" key mapping. The integrated and industry proven 38mm trackball warrants for a comfortable and precise control over the cursor. Units are available as front panel mount and enclosed versions and have PS/2 or USB compatible outputs.

Panel mount version : with twelve M3-threaded studs.

Enclosed version : Robust, steel housing.

SPECIFICATIONS

- Sealing : IP67 for the keyboard part, IP65 static for the trackball
- Switches with travel of 0,3mm and with pressure of 2,55 N
- Positive tactile feedback and key embossing
- Optimum legend colour scheme and contrast
- Compact layout with availability of all major keys
- Separate numeric keypad access via "Fn" key
- Industry proven 38mm trackball with black epoxy ball
- Surface : polyester, chemical resistant
- Carrier plate : aluminium
- Mounting position : all angles
- Operating temperature : 0°C to +60°C
- Output : 1,6 m. PS/2 or USB cable(s)
- Dimensions panel mount : 325 x 150 x 30 mm
- Dimensions enclosed : 337 x 195 x 45 mm
- Weight : 1 kg / 2 kg

CONNECTIVITY

The PS/2 keyboards are supplied with two 1,6 m long shielded straight cable ended with 6 pin mini DIN plugs. The USB versions are supplied with one 1,6m long shielded straight cable ended by a USB type A connector.

** Due to the increasing differences of PS/2 mouse port specifications of the various PC manufacturers, we do recommend that this unit should be tested on the final PC configuration and operating system prior to installing it in series.*

ORDER INFO

LAYOUT	PANEL MOUNT	ENCLOSED
US Qwerty	KSTM80 F1 xxx	KSTM80 S1 xxx

xxx = protocol output : PS/2 or USB

80 KEY COMPACT SHORT TRAVEL KEYBOARD



DIMENSIONAL DRAWING



Panel mount

COLOURS

- RAL 7035 light grey
- RAL 9010 true white
- RAL 5003 sapphire blue
- RAL 2011 deep orange

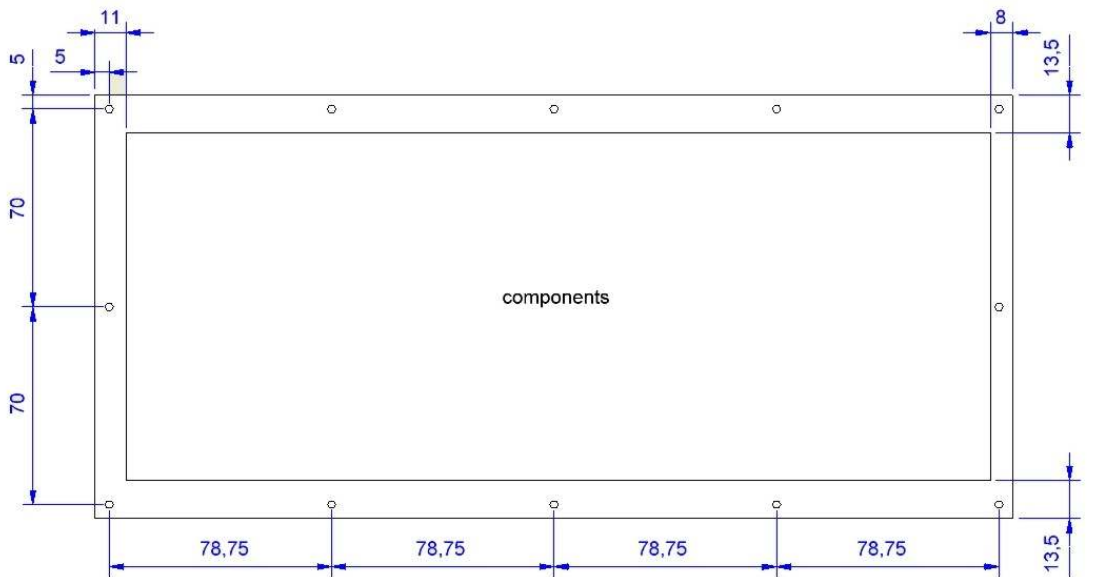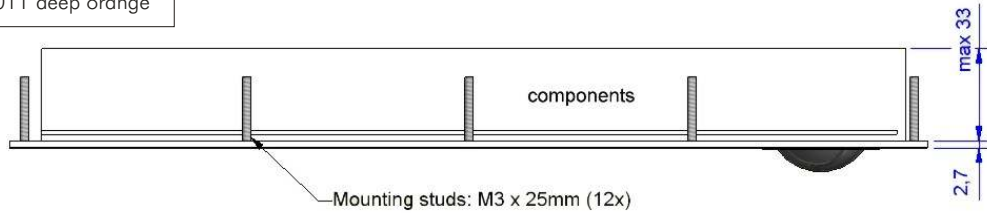

Dim in mm

The company reserves the right to alter without prior knowledge the specification or design of any standard product or service.