

- 106 keys, short travel
- IP67 sealing
- 50mm waterproof trackball

# LED BACKLIT WATERPROOF KEYBOARD

This 106 key backlit keyboard has a multi-functional layout with separate numerical- and control keypads and integrates a large 50 mm optical trackball with removable ball. It has a long life, low power LED backlighting using fiber optics techniques. Panel mount, panel mount with bezel and desktop version available.

### **MAIN FEATURES**

- User-friendly layout with separate numerical-, control- and function keypads
- · Removable 50 mm optical trackball for easy cleaning
- · High brightness LED's with fibre optics
- Dimmable backlighting at 8 levels by two dedicated keys
- · Intelligent luminosity setting of "numlock" and "capslock" LED's
- No external power supply necessary, keyboard port power sufficient
- Illumination of the key legends and contour, the trackball contour and even customer logo's or trademarks
- · Low power LED's warrant for a long life
- · White backlighting as standard, other colours on request
- Customized backlight control by an external DC voltage, PWM signal or potentiometer is available on request

#### PANEL MOUNT VERSION

- · Aluminium carrier
- Front panel mounting by means of M3 threaded studs
- · Added silicon sponge seal for perfect sealing into the user's panel
- The rear side components are protected by a covering metal plate
- When the keyboard cannot be sunk mounted, we recommend the bezel version for edge protection
- Dimensions with bezel: 447,5 x 167,5 x 60,20 mm weight: 1,3 kg  $\,$
- Dimensions without bezel: 432,4 x 152,4 x 60,20 mm weight: 1,2 kg

#### **DESKTOP VERSION**

- · The keyboard is mounted in a robust, all steel enclosure
- · Industrial epoxy coating (mid-grey).
- Dimensions: 475 x 211 x 60,9 mm
- Weight: 3,5 kg

## **GENERAL TECHNICAL SPECIFICATIONS**

#### **KEYBOARD**

Sealing IP67 sealed

Keys 106 short travel switches, tactile feel

switches with 0,3 mm travel and 2,55  $\ensuremath{\text{N}}$ 

operating force

Pointing device 50 mm optical trackball, grey ball Output 1,8m USB cables type A connector

Power requirements Directly from USB port

Operating temp. -15°C to +70°C

Front layer Black polyester front layer with embossed

keys, scratch and chemical resistant

#### **CUSTOMIZATION**

Possible customization includes adapted backlighting controls, addition of company logo or specific function keys, different layouts, different colour.



# **ORDER INFO**

COUNTRY LAYOUT	PANEL MOUNT WITH BEZEL	PANEL MOUNT	DEKSTOP VERSION
US Qwerty	KSMX106B1xxx-WLED	KSMX106F1xxx-WLED	KSMX106S1xxx-WLED
Cyrillic Qwerty	KSMX106B7xxx-WLED	KSMX106F7xxx-WLED	KSMX106S7xxx-WLED
UK Qwerty	KSMX106B44xxx-WLED	KSMX106F44xxx-WLED	KSMX106S44xxx-WLED
Danish Qwerty	KSMX106B45xxx-WLED	KSMX106F45xxx-WLED	KSMX106S45xxx-WLED
Swedish Qwerty	KSMX106B46xxx-WLED	KSMX106F46xxx-WLED	KSMX106S46xxx-WLED
German Qwertz	KSMX106B49xxx-WLED	KSMX106F49xxx-WLED	KSMX106S49xxx-WLED
Turkish Qwerty	KSMX106B90xxx-WLED	KSMX106F90xxx-WLED	KSMX106S90xxx-WLED

xxx = protocol output: USB output or PS/2
White backlighting as standard, other colours on request

p 1 / 4

VER 1 - 2023 09



## **DIMENSIONAL DRAWING**

PANEL MOUNT WITH BEZEL





### **COLOURS**

- Keyboard & Key Background: Pantone Black 2 C 2X
- Key edges & key legends: White Translucent

p 2 / 4





## **DIMENSIONAL DRAWING**

## PANEL MOUNT







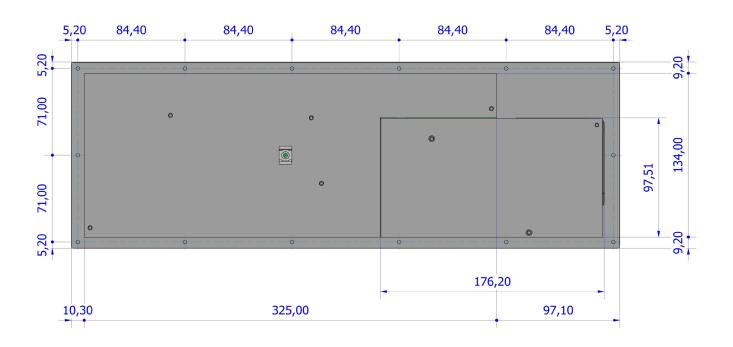

## **COLOURS**

- Keyboard & Key Background: Pantone Black 2 C 2X
- Key edges & key legends: White Translucent


p3/4




### **DIMENSIONAL DRAWING**

### **DESKTOP**







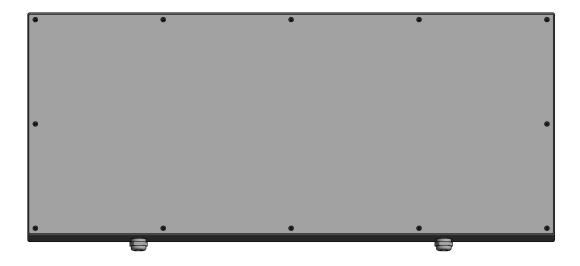

### **COLOURS**

- Keyboard & Key Background: Pantone Black 2 C 2X
- Key edges & key legends: White Translucent

p4/4